LEGM75BH120L1S

IGBT Power Module

Features:

- V_{CE}=1200V I_C=75A
- Low $V_{CE(sat)}$
- V_{CEsat} with positive temperature coefficient
- Maximum junction temperature 175℃
- Isolation Type Package


Applications:

- The inverter
- Motor control and drives

Package Type & Internal Circuit



L1

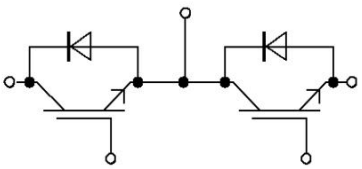

Internal Circuit

Maximum Rated Values (IGBT Inverter)

Symbol	Parameter	Conditions	Ratings	Unit
V_{CES}	Collector-emitter voltage	V_{EC}=0 V,I_C=1mA,T_{vj}=25℃	1200	V
I_C	Continuous Collector Current	T_C=100℃	75	A
I_{CRM}	Peak Collector Current	I_{CRM}=2I_C	150	A
V_{GES}	Gate-Emitter Voltage	T_{vj}=25℃	±30	V
P_{tot}	Total Power Dissipation	T_C=25℃,T_{vjmax}=150℃	350	W

Characteristics Values (IGBT Inverter)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C=75 A, V_{GE}=15 V, T_{vj}=25 ℃		1.83	2.3	V
		I_C=75 A, V_{GE}=15 V, T_{vj}=150 ℃		2.3		V
$V_{GE(th)}$	Gate Threshold Voltage	I_C=5.0 mA,V_{CE}=V_{GE},T_{vj}= 25 ℃	5.2	6.2	6.5	V
I_{CES}	Collector-Emitter Cut-off Current	V_{CE}=1200 V, V_{GE}=0 V, T_{vj}=25 ℃			20	μA
I_{GES}	Gate-Emitter Leakage Current	V_{CE}=0 V, V_{GE}=15 V, T_{vj}=25 ℃			200	nA
$t_{d(on)}$	Turn-on Delay Time, Inductive Load	I_C= 75 A,V_{CE}= 600 V V_{GE} =±15 V R_G = 2Ω T_{vj} = 25 ℃		66		ns
t_r	Rise Time, Inductive Load			35		ns
$t_{d(off)}$	Turn-off Delay Time, Inductive Load			270		ns
t_f	Fall Time, Inductive Load			170		ns
E_{on}	Turn-on Energy Loss per Pulse			2.3		mJ
E_{off}	Energy Loss per Pulse			6.4		mJ
$t_{d(on)}$	Turn-on Delay Time, Inductive Load	I_C = 75 A,V_{CE} = 600 V V_{GE} = ±15 V R_G = 2 Ω T_{vj}= 150 ℃		720		ns
t_r	Rise Time, Inductive Load			32		ns
$t_{d(off)}$	Turn-off Delay Time, Inductive Load			335		ns
t_f	Fall Time, Inductive Load			276		ns
E_{on}	Turn-on Energy Loss per Pulse			2.7		mJ
E_{off}	Energy Loss per Pulse			7.3		mJ
R_{thJC}	Thermal resistance, junction to case	per IGBT			0.35	K/W
$T_{vj\ op}$	Temperature under switching conditions		-40		150	℃
I_{SC}	SC data	V_{GE} ≤15 V, V_{CC} = 900 V V_{CEmax} = V_{CES} -L_{sCE} ·di/dt t_P ≤ 10 μs, T_{vj} = 150 ℃		350		A

Maximum Rated Values (Diode Inverter)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	T_{vj}= 25 ℃		1200		V
I_F	Continuous DC Forward Current	T_C=100 ℃		35		A
I_{FRM}	Repetitive Peak Forward Current	t_P=1 ms		70		A
I^2t	I^2t Value	V_R=0 V, t_P=10 ms, T_{vj}=150 ℃		550		A^2s


Characteristic Values (Diode Inverter)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_F	Forward Voltage	I_F=30 A, V_{CE}=0 V, T_{vj}=25 ℃		1.9	2.2	V
		I_F=30 A, V_{CE}=0 V, Tvj=150 ℃		1.9	2.2	V
t_{rr}	Reverse Recovery time	I_F=30 A,V_R=600 V -di/dt=350 A/us T_{vj}=25 ℃		350		ns
Q_r	Recovered Charge			2.3		uC
E_{rec}	Reverse Recovery Energy			0.8		mJ
t_{rr}	Reverse Recovery time	I_F=30A,V_R=600 V -di/dt=350 A/us Tvj=150 ℃		620		ns
Q_r	Recovered Charge			4.5		uC
E_{rec}	Reverse Recovery Energy			1.25		mJ
R_{thJC}	Thermal resistance, junction to case	per Diode			0.83	K/W
$T_{vj\ op}$	Operating Junction Temperature		-40		150	℃


Module Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{isol}	Isolation voltage	t=1min,f=50Hz	2500			V
T_{stg}	Storage Temperature		-40		150	℃
M_t	Module Electrodes Torque	Recommended(M5)	2.5		5.0	N·m
M_s	Module-to-Sink Torque	Recommended(M6)	3.0		6.0	N·m
G	Weight of Module			160		g


Output characteristic of IGBT,Inverter(typical)
$I_C = f(V_{CE})$
V_{GE} = 15V

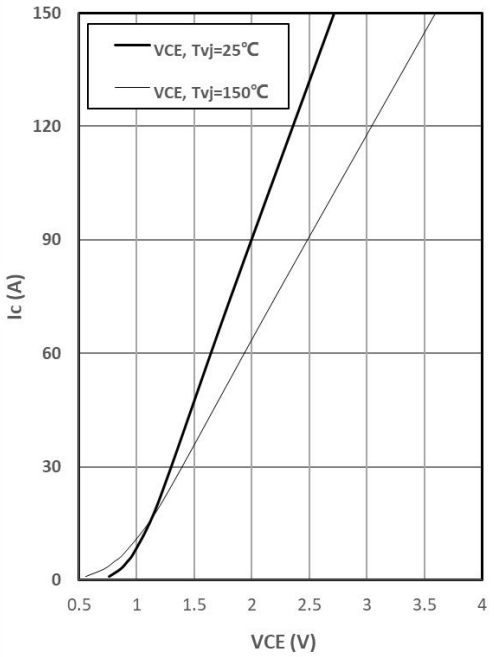


Switching losses IGBT,Inverter(typical)
$E_{on} = f(I_C)$, $E_{off} = f(I_C)$
V_{GE}= ±15V, R_G= 2Ω, V_{CE} = 600V

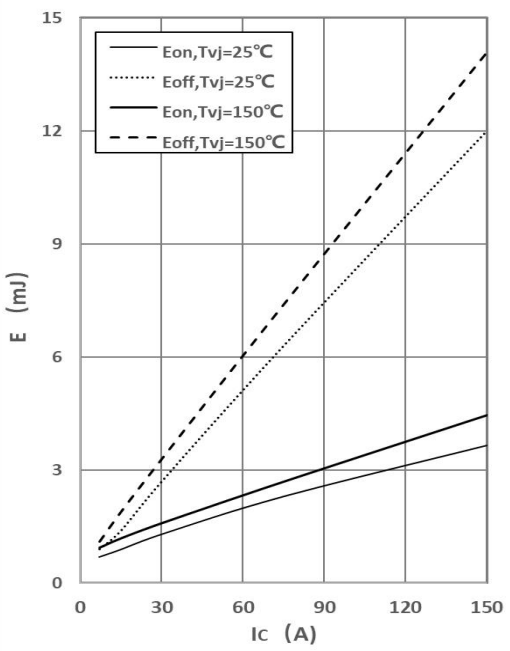

Switching losses IGBT,Inverter(typical)
$E_{on} = f(R_G)$, $E_{off} = f(R_G)$
V_{GE} = ±15V, I_C = 75A , V_{CE} = 600V

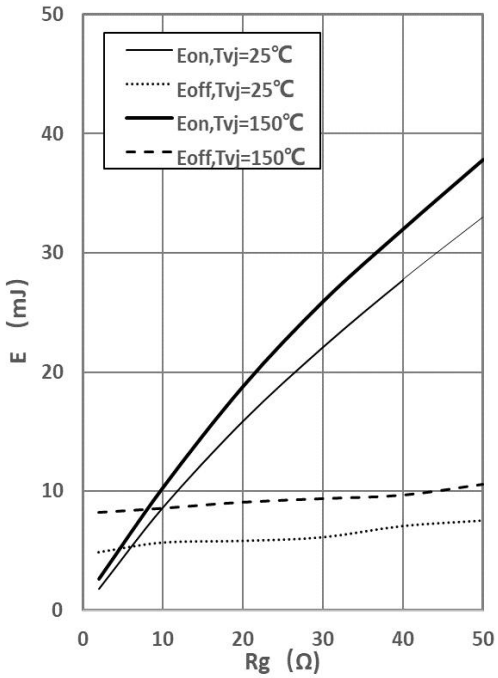


RBSOA IGBT,Inverter (typical)
$I_C = f(V_{CE})$
V_{GE} = ±15V, R_G= 2Ω, T_{vj} =150 ℃

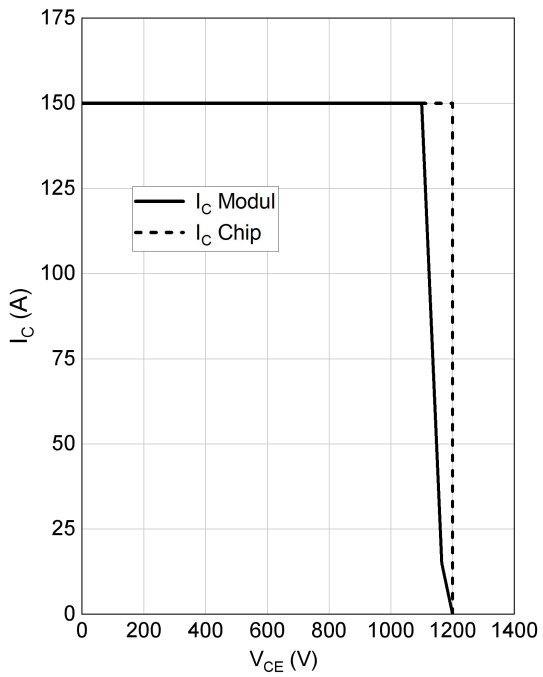

Forward characteristic of Diode, Inverter (typical)


$I_F = f(V_F)$

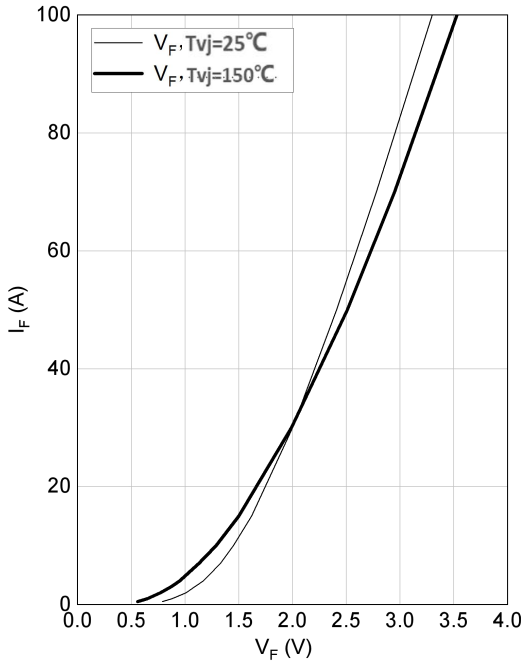

Switching losses Diode, Inverter (typical)

$E_{rec} = f(R_G)$


I_F = 75 A, V_{CE} = 600 V

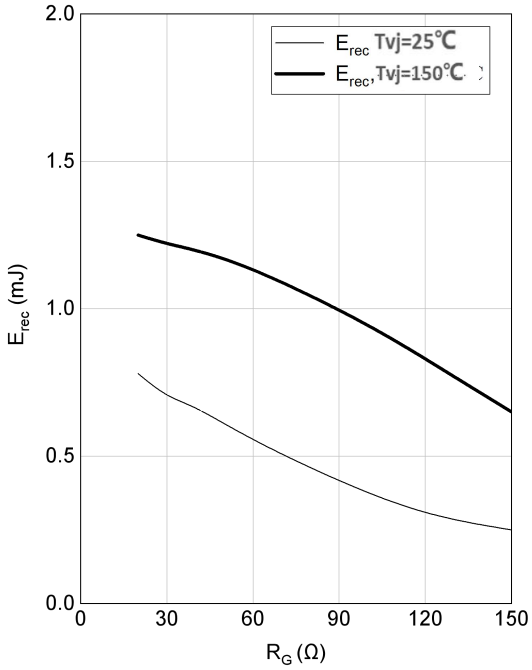


Switching losses Diode, Inverter (typical)

$E_{rec} = f(I_F)$

R_G = 2Ω, V_{CE} = 600 V

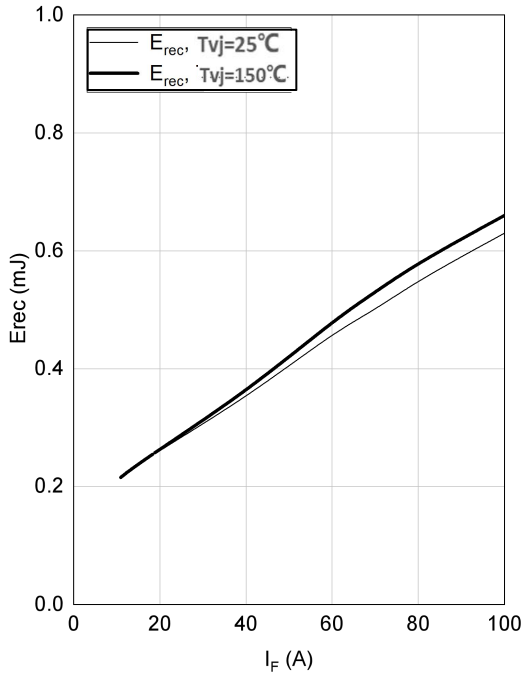


Circuit Diagram

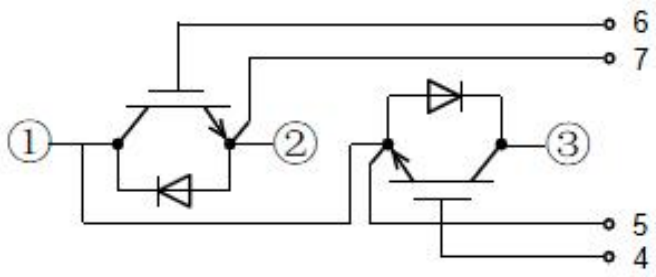

Package Dimensions

(Dimensions in Millimeters)

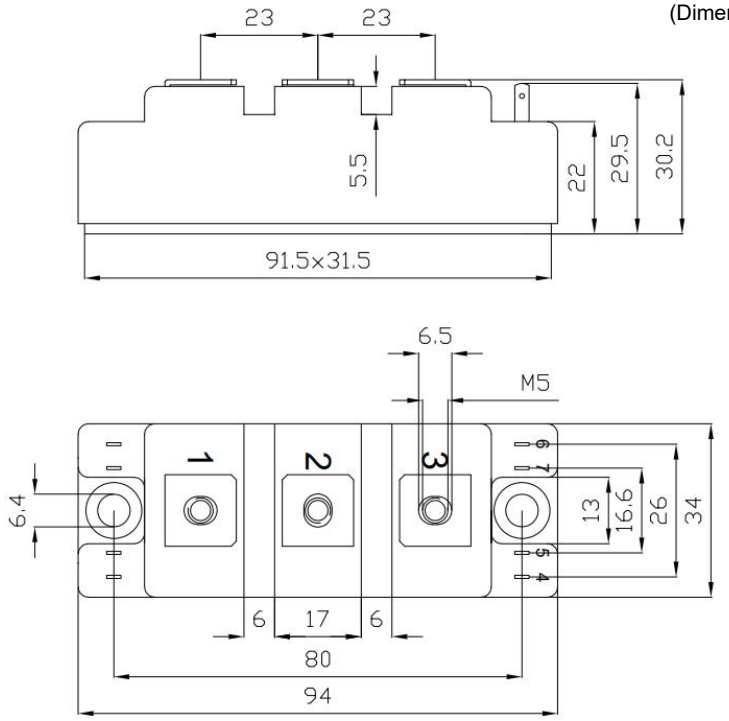

DISCLAIMER

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.