

LEGM75BH120L1S

IGBT Power Module

Features:

- $V_{CE}=1200V$ $I_C=75A$
- Low $V_{CE(sat)}$
- V_{CEsat} with positive temperature coefficient
- Maximum junction temperature 175°C
- Isolation Type Package


Applications:

- The inverter
- Motor control and drives

Package Type & Internal Circuit



L1

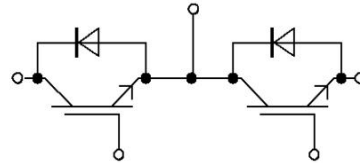

Internal Circuit

Maximum Rated Values (IGBT Inverter)

Symbol	Parameter	Conditions	Ratings	Unit
V_{CES}	Collector-emitter voltage	$V_{EC}=0V, I_C=1mA, T_{vj}=25^\circ C$	1200	V
I_C	Continuous Collector Current	$T_C=100^\circ C$	75	A
I_{CRM}	Peak Collector Current	$I_{CRM}=2I_C$	150	A
V_{GES}	Gate-Emitter Voltage	$T_{vj}=25^\circ C$	± 30	V
P_{tot}	Total Power Dissipation	$T_C=25^\circ C, T_{vjmax}=150^\circ C$	350	W

Characteristics Values (IGBT Inverter)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=75\text{ A}, V_{GE}=15\text{ V}, T_{vj}=25\text{ }^\circ\text{C}$		1.95	2.5	V
		$I_C=75\text{ A}, V_{GE}=15\text{ V}, T_{vj}=150\text{ }^\circ\text{C}$		2.46		V
$V_{GE(th)}$	Gate Threshold Voltage	$I_C=5.0\text{ mA}, V_{CE}=V_{GE}, T_{vj}=25\text{ }^\circ\text{C}$	5.2	6.2	6.5	V
I_{CES}	Collector-Emitter Cut-off Current	$V_{CE}=1200\text{ V}, V_{GE}=0\text{ V}, T_{vj}=25\text{ }^\circ\text{C}$			20	μA
I_{GES}	Gate-Emitter Leakage Current	$V_{CE}=0\text{ V}, V_{GE}=15\text{ V}, T_{vj}=25\text{ }^\circ\text{C}$			200	nA
$t_{d(on)}$	Turn-on Delay Time, Inductive Load	$I_C = 75\text{ A}, V_{CE} = 600\text{ V}$ $V_{GE} = \pm 15\text{ V}$ $R_G = 2\Omega$ $T_{vj} = 25\text{ }^\circ\text{C}$		66		ns
t_r	Rise Time, Inductive Load			35		ns
$t_{d(off)}$	Turn-off Delay Time, Inductive Load			270		ns
t_f	Fall Time, Inductive Load			170		ns
E_{on}	Turn-on Energy Loss per Pulse			2.3		mJ
E_{off}	Energy Loss per Pulse			5.4		mJ
$t_{d(on)}$	Turn-on Delay Time, Inductive Load		$I_C = 75\text{ A}, V_{CE} = 600\text{ V}$ $V_{GE} = \pm 15\text{ V}$ $R_G = 2\Omega$ $T_{vj} = 150\text{ }^\circ\text{C}$		720	
t_r	Rise Time, Inductive Load			32		ns
$t_{d(off)}$	Turn-off Delay Time, Inductive Load			335		ns
t_f	Fall Time, Inductive Load			276		ns
E_{on}	Turn-on Energy Loss per Pulse			2.7		mJ
E_{off}	Energy Loss per Pulse			6.2		mJ
R_{thJC}	Thermal resistance, junction to case	per IGBT				0.35
$T_{vj\ op}$	Temperature under switching conditions		-40		150	$^\circ\text{C}$
I_{SC}	SC data	$V_{GE} \leq 15\text{ V}, V_{CC} = 900\text{ V}$ $V_{CEmax} = V_{CES} - L_{sCE} \cdot di/dt$ $t_p \leq 10\ \mu\text{s}, T_{vj} = 150\text{ }^\circ\text{C}$		350		A

Maximum Rated Values (Diode Inverter)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	$T_{vj}=25\text{ }^{\circ}\text{C}$		1200		V
I_F	Continuous DC Forward Current	$T_C=100\text{ }^{\circ}\text{C}$		35		A
I_{FRM}	Repetitive Peak Forward Current	$t_p=1\text{ ms}$		70		A
I^2t	I^2t Value	$V_R=0\text{ V}, t_p=10\text{ ms}, T_{vj}=150\text{ }^{\circ}\text{C}$		550		A^2s


Characteristic Values (Diode Inverter)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	
V_F	Forward Voltage	$I_F=30\text{ A}, V_{CE}=0\text{ V}, T_{vj}=25\text{ }^{\circ}\text{C}$		1.9	2.2	V	
		$I_F=30\text{ A}, V_{CE}=0\text{ V}, T_{vj}=150\text{ }^{\circ}\text{C}$		1.9	2.2	V	
t_{rr}	Reverse Recovery time	$I_F=30\text{ A}, V_R=600\text{ V}$ $-di/dt=350\text{ A/us}$ $T_{vj}=25\text{ }^{\circ}\text{C}$		350		ns	
Q_r	Recovered Charge			2.3		μC	
E_{rec}	Reverse Recovery Energy			0.8		mJ	
t_{rr}	Reverse Recovery time	$I_F=30\text{ A}, V_R=600\text{ V}$ $-di/dt=350\text{ A/us}$ $T_{vj}=150\text{ }^{\circ}\text{C}$		620		ns	
			Q_r	Recovered Charge		4.5	μC
			E_{rec}	Reverse Recovery Energy		1.25	mJ
R_{thJC}	Thermal resistance, junction to case	per Diode			0.83	K/W	
$T_{vj\text{ op}}$	Operating Junction Temperature		-40		150	$^{\circ}\text{C}$	


Module Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{isol}	Isolation voltage	$t=1\text{ min}, f=50\text{ Hz}$	2500			V
T_{stg}	Storage Temperature		-40		150	$^{\circ}\text{C}$
M_t	Module Electrodes Torque	Recommended(M5)	2.5		5.0	$\text{N}\cdot\text{m}$
M_s	Module-to-Sink Torque	Recommended(M6)	3.0		6.0	$\text{N}\cdot\text{m}$
G	Weight of Module			160		g

Circuit Diagram

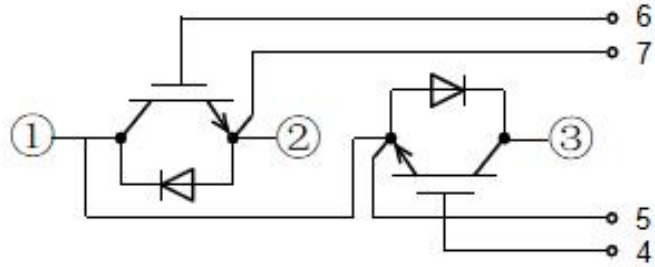

Package Dimensions

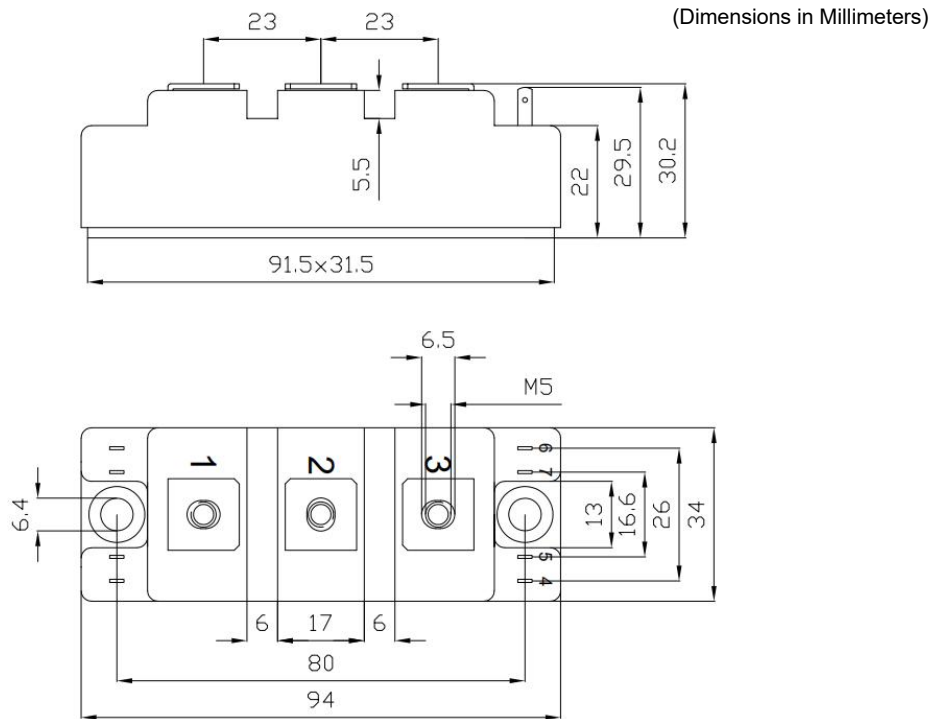

DISCLAIMER

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.